MODEL: MT4601B02-1

Ver. 1.1

Date: 22.May.2012

Customer's Approval	CSOT		
Signature Date	Approved By Product Director		Date
	Name:		
	Signature:		
	Reviewed By PM Manager		Date
	Name:		
	Signature:		
	Reviewed By Project Leader		Date
	Name:		
	Signature:		
	Reviewed By PM		Date
	Name:		
	Signature:		

Contents

Revision History

Version	Date	Page (New)	Section	Description	Revision by
Ver. 0.1	28.Apr.2012	31	10	Tentative Specification was First Issued.	Wu Chenguo
Ver 0.1	9.May.2012	21	10	Modify the minimum Center Luminance.	Wu Chenguo

1. General Description

1.1 Product Features

- **FHD Resolution (1920 x 1080)**

- **High Brightness: 350 cd/m²**

- **Very High Contrast Ratio: 4000:1**

- **Fast Response Time**

- **High Color Saturation: 72% NTSC**

- **Ultra Wide Viewing Angle: 178° (H)/178° (V) (CR ≥ 10)**

- **Low Power Consumption: Typ. 85 W**

- **DE (Data Enable) Mode**

- **LVDS (Low Voltage Differential Signaling) Interface**

1.2 Overview

MT4601B02-1 is a diagonal 46.0" color active matrix LCD module with edge LED backlight and 2ch-LVDS interface. This module is a transmissive type display operating in the normally black mode. It supports 1920 x 1080 FHD resolution and can display up to 16.7M colors (8-bit). Each pixel is divided into Red, Green and Blue sub-pixels which are arranged in vertical stripe. The converter of backlight is built-in.

This module dedicates for LCD TV products and provides excellent performance which includes high brightness, ultra wide viewing angle, high color saturation and high color depth.

1.3 General Information

Item	Specification	Unit	Note
Active Area	1018.08 (H) x 572.67 (V)	mm	
Bezel Opening Area	1024.9 (H) x 579.3 (V)	mm	
Outline Dimension	1054.9 (H) x 610.8 (V) x 10.8 (D)	mm	D: From Bezel to Rear
Weight	9.5	kg	Max.
Driving Scheme	a-Si TFT Active Matrix	-	
Number of Pixels	1920 x 1080	pixel	
Pixel Pitch (Sub Pixel)	0.17675 (H) x 0.53025 (V)	mm	
Pixel Arrangement	RGB Vertical Stripe	-	
Display Colors	16.7 M	color	8-bit
Display Mode	Transmissive Mode, Normally Black	-	
Surface Treatment	Anti-glare, Haze 2%,Hard Coating (3H)	-	
Luminance of White	350	cd/m²	Center Point, Typ.

2. Absolute Maximum Ratings

2.1 Absolute Maximum Ratings (Ta = 25 ± 2 °C)

The followings are maximum values which, if exceeded, may cause damage to the unit.

Item	Symbol	Value		Unit
		Min.	Max.	
Power Supply Voltage	V_{CC}	- 0.3	14	V
Input Signal Voltage	V_{IN}	- 0.3	4	V
Light Bar Voltage	V_W	75.4	93.6	V_{RMS}
Converter Input Voltage	V_{BL}	0	30	V
Control Signal Level	-	-0.3	7.0	V

2.2 Environment Requirement

(1) Temperature and relative humidity range are shown as below.
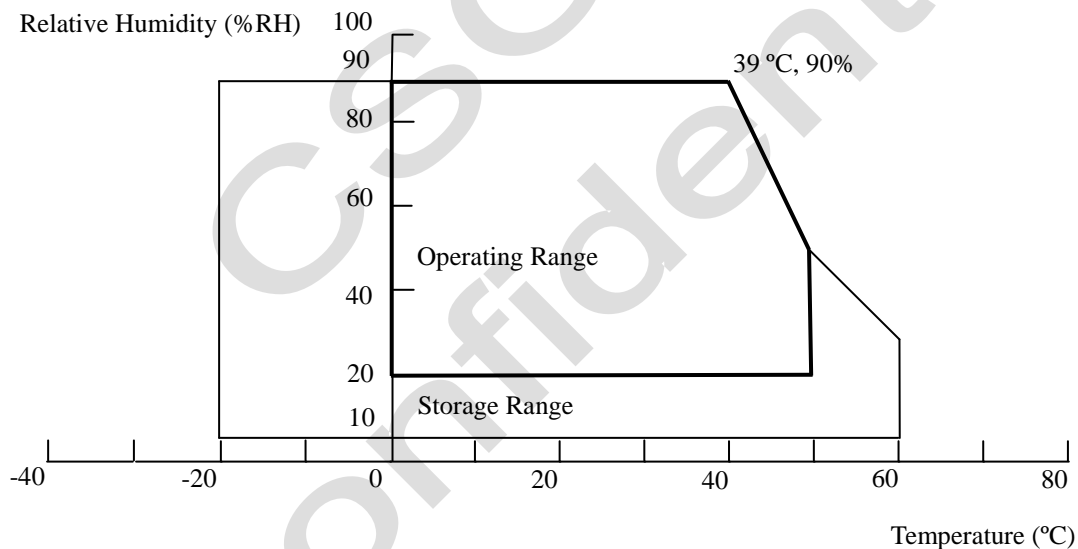
(a) 90%RH maximum (Ta ≤ 39 °C).

(b) Wet-bulb temperature should be 39 °C maximum (Ta > 39 °C).

(c) No condensation.

(2) The storage temperature is between - 20 °C to 60 °C, and the operating ambient temperature is between 0 °C to 50 °C.

The maximum operating temperature is based on the test condition that the surface temperature of display area is less than or equal to 65 °C with LCD module in a temperature controlled chamber alone. Thermal management should be considered in final product design to prevent the surface temperature of display area from being over 65 °C. The range of operating temperature may degrade in case of improper thermal management in the end product design.

(3) The TFT module including glass should be avoided any shock or vibration.

While testing shock and vibration, the fixture holding the module should be assured to be hard and rigid enough to prevent the module twisted or bent by the fixture. The test conditions should be less than:

Shock (Non-operating): 35 G, 11 ms, half sine wave, 1 time for ± X, ± Y, ± Z.

Vibration (Non-operating): Random 1.0 Grms, 10 ~ 200 Hz, 10 min, 1 time for each X, Y, Z.

2.3 Package Storage

When storing modules as spares for a long time, please follow the precaution instructions:

(1) Do not store the module in high temperature and high humidity for a long time. It is highly recommended to store the module with temperature from 0 ℃ to 35 ℃ in normal humidity.

(2) The module shall be stored in a dark area and avoided to be exposed in direct sunlight or fluorescent light.

3. Electrical Specification

3.1 Electrical Characteristics

3.1.1 Power Consumption (Ta = 25 ± 2 °C)

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		V_{CC}	10.8	12.0	13.2	V	(1)
Rush Current		I_{RUSH}	-	-	2.3	A	(2)
Power Supply Current	White Pattern	I_{CC}	-	0.25	0.33	A	(3)
	Horizontal Stripe	I_{CC}	-	0.56	0.73	A	
	Black Pattern	I_{CC}	-	0.26	0.34	A	

Note:

(1) The ripple voltage should be controlled less than 10% of V_{CC}.

(2) Measurement condition: V_{CC} rising time = 470 μs.

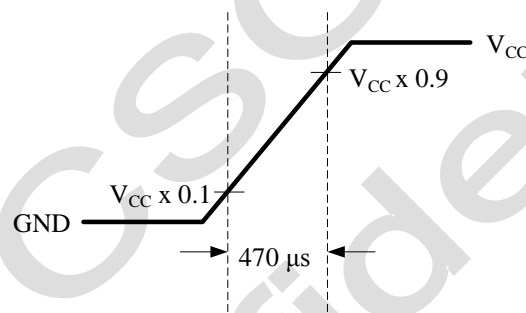Fig. 3.1 V_{CC} rising time condition

(3) Measurement condition: V_{CC} = 12 V, Ta = 25 ± 2 °C, F = 60 Hz. The test patterns are shown as below.

A. White Pattern

B. Horizontal Pattern

C. Black Pattern
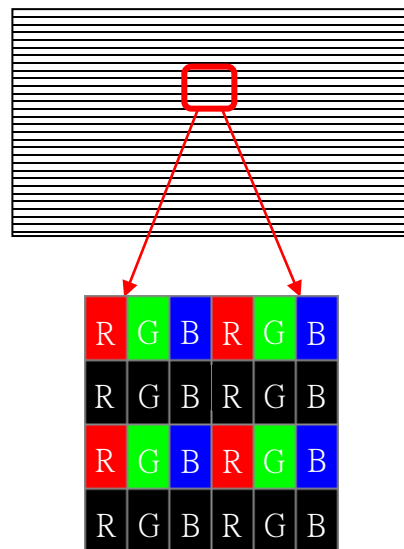
Fig. 3.2 Test patterns

3.1.2 LVDS Characteristics

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
LVDS Interface	Differential Input High Threshold Voltage	V_{TH}	+ 100	-	-	mV	(1)
	Differential Input Low Threshold Voltage	V_{TL}	-	-	- 100	mV	
	Common Input Voltage	V_{CM}	1.0	1.2	1.4	V	
	Differential Input Voltage	$|V_{ID}|$	200	400	600	mV	
	Terminating Resistor	R_T	80	100	120	ohm	
CMOS Interface	Input High Threshold Voltage	V_{IH}	2.7	-	3.3	V	
	Input Low Threshold Voltage	V_{IL}	0.0	-	0.7	V	

Note:

(1) The LVDS input signal has been defined as follows:

Fig. 3.3 LVDS input signal

3.2 Backlight Converter Unit

3.2.1 LED Converter Electrical Characteristics (Ta = 25 ± 2 °C)

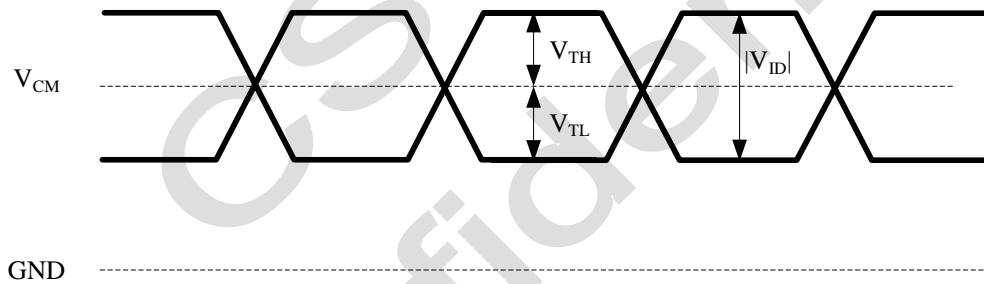| Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Consumption		P_{BL}	-	78.0	-	W_{att}	
Input Voltage		V_{BL}	22.8	24.0	25.2	V	
Input Current		I_{BL}	-	3.25	-	A	
Input Inrush Current		I_{RS-VIN}	-	-	8.0	A	(1)
		I_{RS-EN}	-	-	7.0	A	(2)
On/Off Control Voltage	On	V_{BLON}	2.4	3.3	5.0	V	
	Off		0.0	-	0.8	V	
On/Off Control Current	-	I_{BLON}	-	-	1.5	mA	
PWM Dimming Control Voltage	Max.	V_{PDIM}	2.4	-	5.0	V	
	Min.		0.0	-	0.8	V	
External PWM Control Current		I_{P-DIM}	-	-	2	mA	
PWM Dimming Frequency		F_{PWM}	140	180	240	Hz	
Dimming Duty Ratio		D_{DIM}	10	-	100	%	(3)

Note:

(1) The measurement condition: V_{BL} rising time is 30 ms. (V_{BL} from 10% ~ 90%)

(2) The measurement condition: the V_{BL} = 24V, and then on the V_{BLON} = 3.3V.

(3) Less than 10% dimming control is functional well and no backlight happens to shut down.
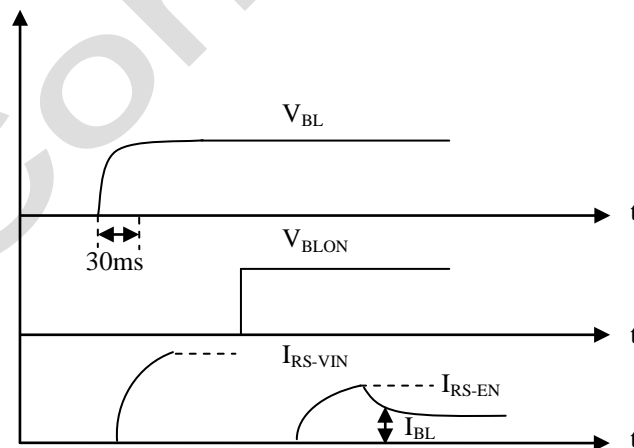
Fig. 3.4 The timing sequence diagram of inrush current measurement

Ver. 1.1

3.2.2 LED Converter Power Sequence

No	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
1	VBL Rising Time	Tr	20	—	—	ms	
2	VBL Falling Time Time	Tf	20	—	—	ms	
3	VBLON Rising Time	Tr1	—	—	100	ms	
4	VBLON Falling Time	Tf1	—	—	100	ms	See Fig.3.5
5	VBL to VP_DIM Delay Time	T1	500	—	—	ms	
6	BLON Delay Time	T2	250	—	—	ms	
7	BLON Off Time	T3	0	—	—	ms	
8	VP_DIM Off Time	T4	250	—	—	ms	

Fig. 3.5 The power sequence of V_{BL} and V_{BLON}

NOTE:The power sequence:

POWER ON : $V_{BL} > V_{P\_DIM} > V_{BLON}$

POWER OFF: $V_{BLON} >= V_{P\_DIM} > V_{BL}$

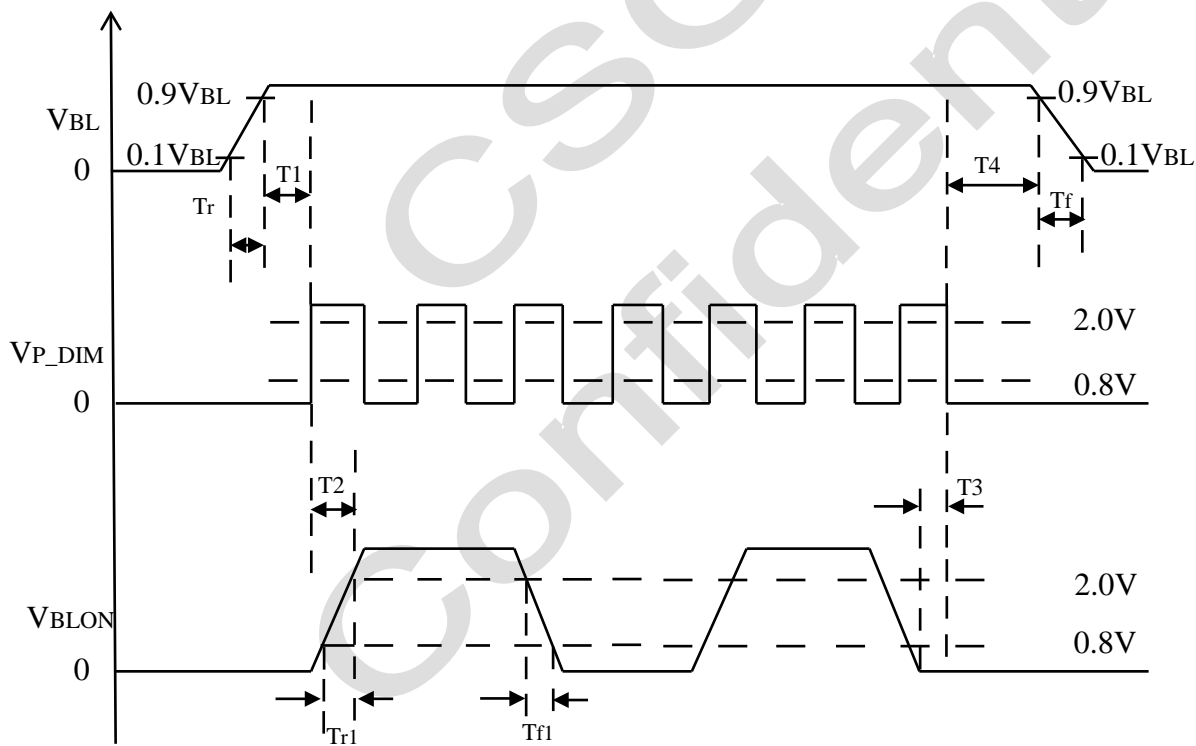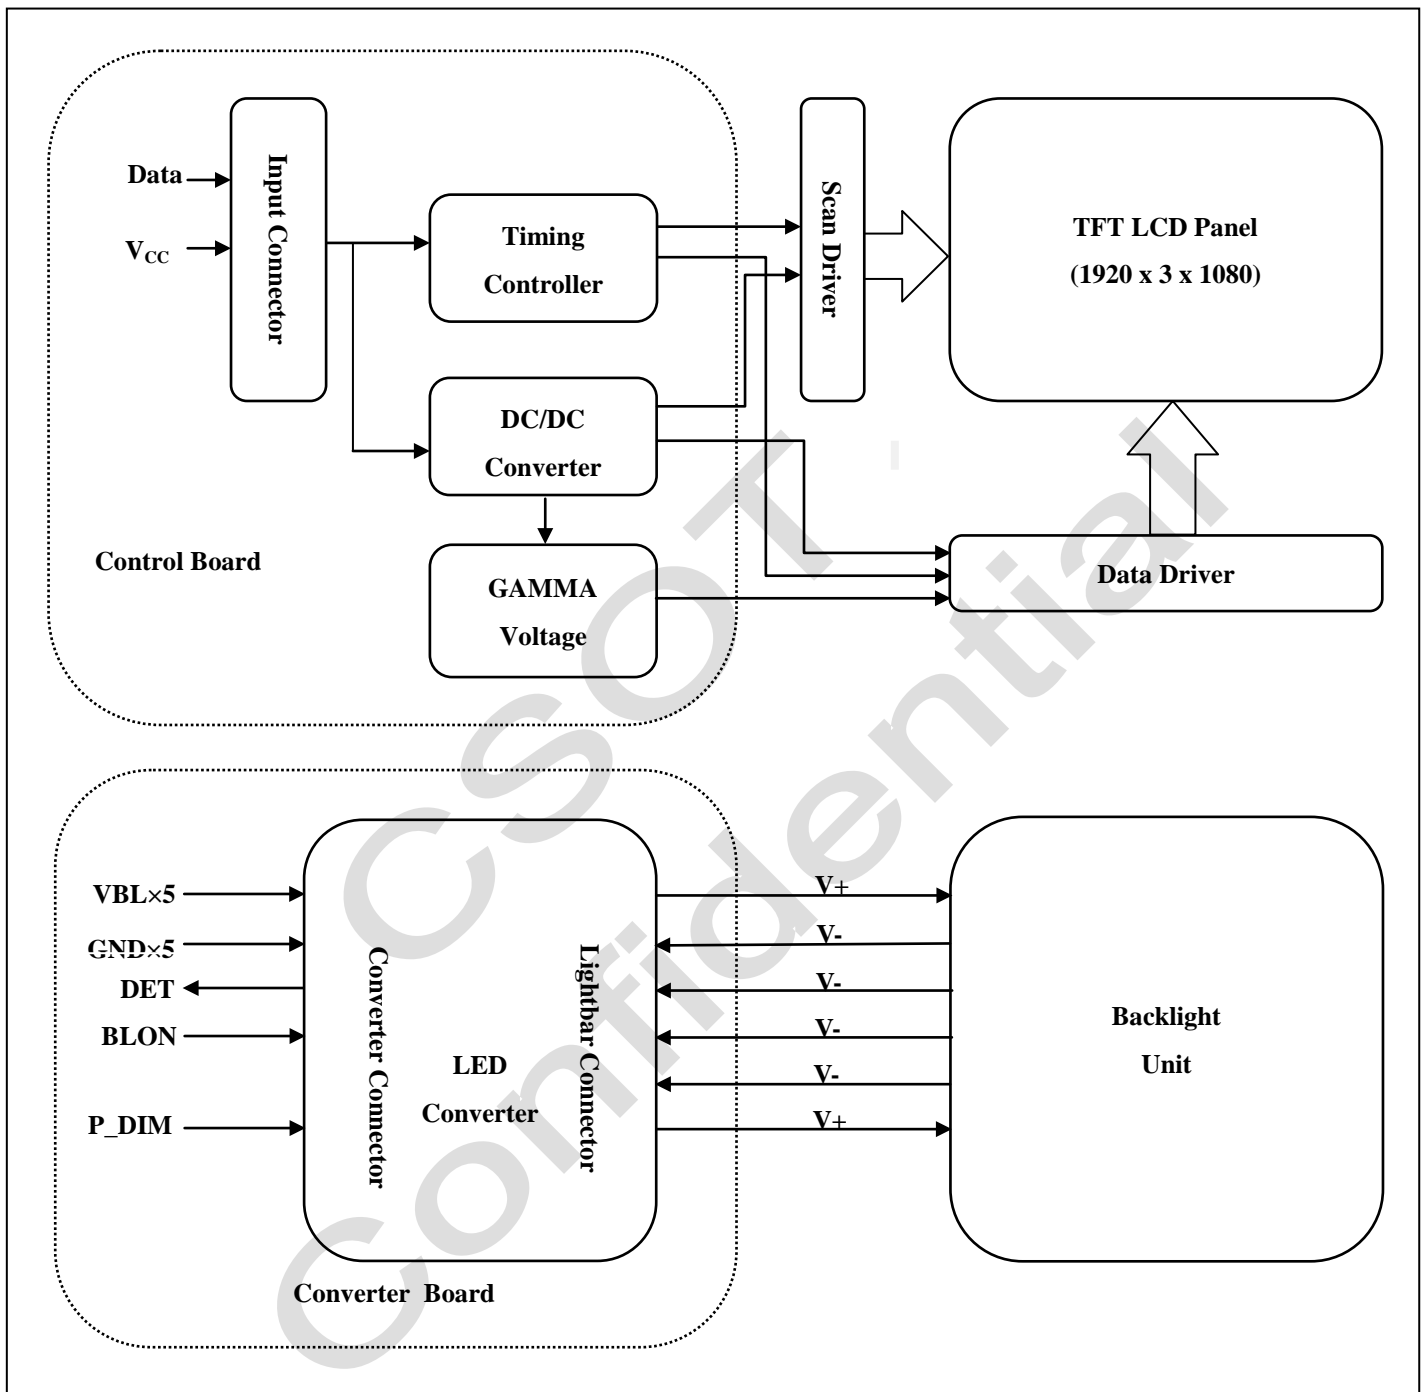## 4. Electrical Block Diagram

5. Input Terminal Pin Assignment

5.1 TFT LCD Module

CN1: 0-511037-5 (Xi Da Yi Tong) or equivalent (see Note (1))

Pin No.	Symbol	Description	Note
1	12V	DC power supply	
2	12V	DC power supply	
3	12V	DC power supply	
4	12V	DC power supply	
5	12V	DC power supply	
6	NC	No Connection	(2)
7	GND	Ground	
8	GND	Ground	
9	GND	Ground	
10	RO[0]N	Odd LVDS Signal -	
11	RO[0]P	Odd LVDS Signal +	
12	RO[1]N	Odd LVDS Signal -	
13	RO[1]P	Odd LVDS Signal +	
14	RO[2]N	Odd LVDS Signal -	
15	RO[2]P	Odd LVDS Signal +	
16	GND	Ground	
17	ROCLK-	Odd LVDS Clock -	
18	ROCLK+	Odd LVDS Clock +	
19	GND	Ground	
20	RO[3]N	Odd LVDS Signal -	
21	RO[3]P	Odd LVDS Signal +	
22	NC	No Connection	
23	NC	No Connection	
24	GND	Ground	
25	RE[0]N	Even LVDS Signal -	
26	RE[0]P	Even LVDS Signal +	
27	RE[1]N	Even LVDS Signal -	
28	RE[1]P	Even LVDS Signal +	
29	RE[2]N	Even LVDS Signal -	
30	RE[2]P	Even LVDS Signal +	
31	GND	Ground	
32	ROCLK-	Even LVDS Clock -	
33	ROCLK+	Even LVDS Clock +	

34	GND	Ground	
35	RE[3]N	Even LVDS Signal -	
36	RE[3]P	Even LVDS Signal +	
37	NC	No Connection	
38	NC	No Connection	
39	GND	Ground	
40	NC	No Connection	
41	NC	No Connection	
42	NC	No Connection	
43	NC	No Connection	
44	NC	No Connection	
45	LVDS_SEL	LVDS Data Format Selection	(3)
46	NC	No Connection	
47	NC	No Connection	
48	NC	No Connection	
49	NC	No Connection	
50	NC	No Connection	
51	NC	No Connection	

Note:

(1) The direction of pin assignment is shown as below:

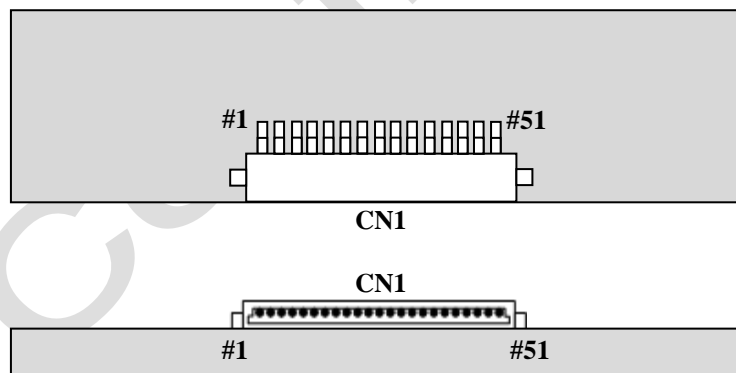
Fig. 5.1 LVDS connector direction sketch map

(2) For CSOT internal only, please let it open.

(3) High: connect to + 3.3 V → VESA format; Low: connect to GND or Open → JEIDA format.

5.2 Converter Unit

5.2.1 Converter Input Connector Pin Definition

CN1: CI0114M1HR0-NH (Cvilux) or equivalent (see 5.2 Note (1))

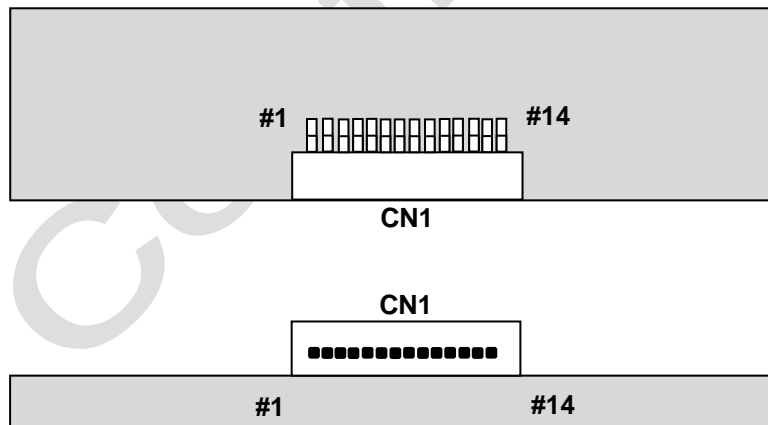| Pin No.	Symbol	Feature
1	V_{BL}	Power Supply, + 24 V DC Regulated
2		
3		
4		
5		
6	GND	GND
7		
8		
9		
10		
11	DET	Normal (0 ~ 0.8 V), Abnormal (Open Collector)
12	BLON	BLON/OFF, BLON Floating: BLU ON
13	NC	NC
14	P_DIM	PWM Dimming Control (Open for 100%)

Note (1):

Fig. 5.2 Power input connector direction sketch map

Attention:

If the external PWM function includes 10% dimming ratio, the judge conditions are as below:

(1) Backlight module must be lighted on normally.

(2) All protection functions must work normally.

(3) Uniformity and flicker could not be guaranteed.

5.3 Block Diagram of Interface

Fig. 5.3 Block diagram of interface
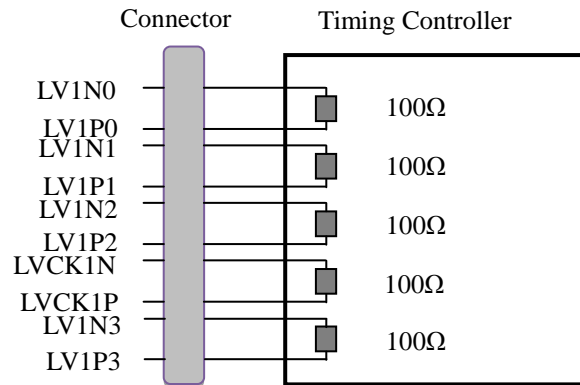
Attention:

(1) LCD module uses a 100 ohms (Ω) resistor between positive and negative lines of each receiver input.

(2) LVDS cable impedance shall be 50 ohms per signal line or about 100 ohms per twist-pair line respectively.

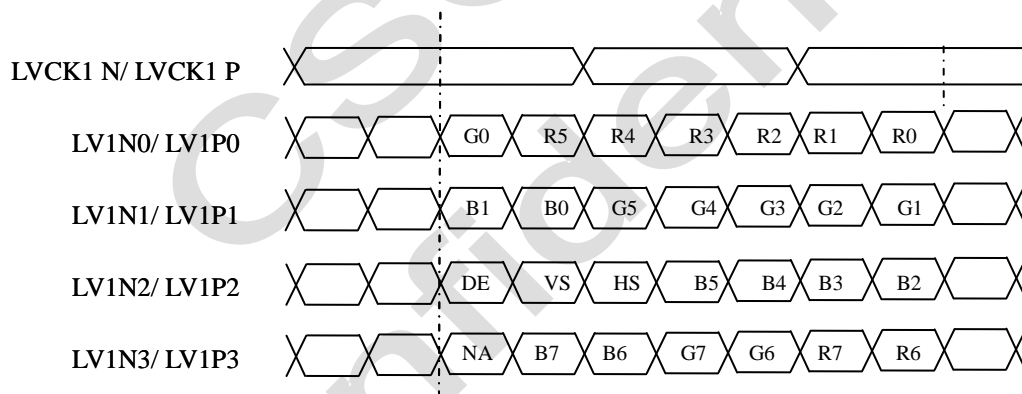## 5.4 LVDS Interface

5.4.1 VESA Format (SELLVDS = H)

Fig. 5.4 VESA format

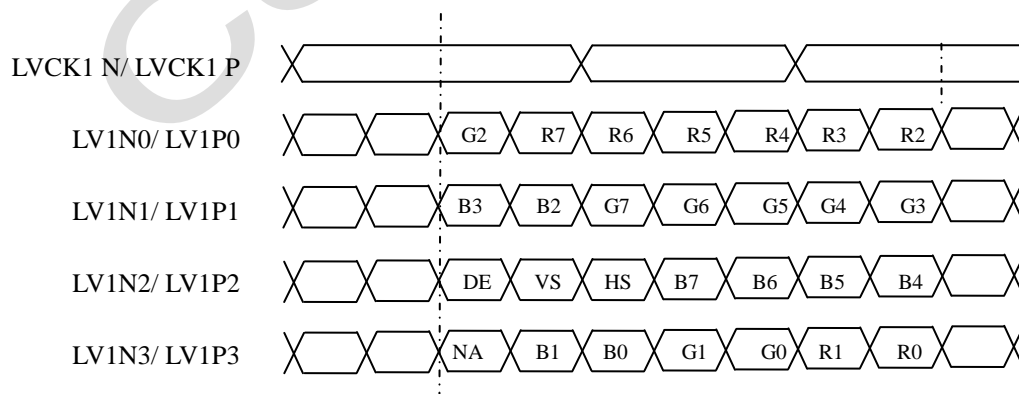### 5.4.2 JEIDA Format (SELLVDS = L or Open)

Fig. 5.5 JEIDA format

5.5 Color Data Input Assignment

The brightness of each primary color is based on the 8-bit gray scale data input for each color. The higher the binary input, the brighter the color. The table below provides the assignment of the color versus.

Data Input Color		Data Signal																							
		Red								Green								Blue							
		MSB							LSB	MSB							LSB	MSB							LSB
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Red (0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red (254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	Green (0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green (254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green (255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale of Blue	Blue (0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue (254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue (255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Attention:

0: Low level voltage; 1: High level voltage.

Ver. 1.1

6. Interface Timing

6.1 Timing Table (DE Only Mode)

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Clock	Frequency	F_{CLK} $(= 1 / T_{CLK})$	65	74.25	77.5	MHz	
Vertical Term	Frame Rate	F	48	60	62.5	Hz	
	Vertical Frequency	F_V	60	67.5	70	KHz	
	Total	T_V	1092	1125	1380	T_H	$T_V = T_{VD} + T_{VB}$
	Display	T_{VD}		1080		T_H	
	Blank	T_{VB}	12	45	300	T_H	
Horizontal Term	Total	T_H	1046	1100	1174	T_{CLK}	$T_H = T_{HD} + T_{HB}$
	Display	T_{HD}		960		T_{CLK}	
	Blank	T_{HB}	86	140	214	T_{CLK}	

Attention:

(1) The module is operated in DE only mode, H sync and V sync input signal have no effect on normal operation.
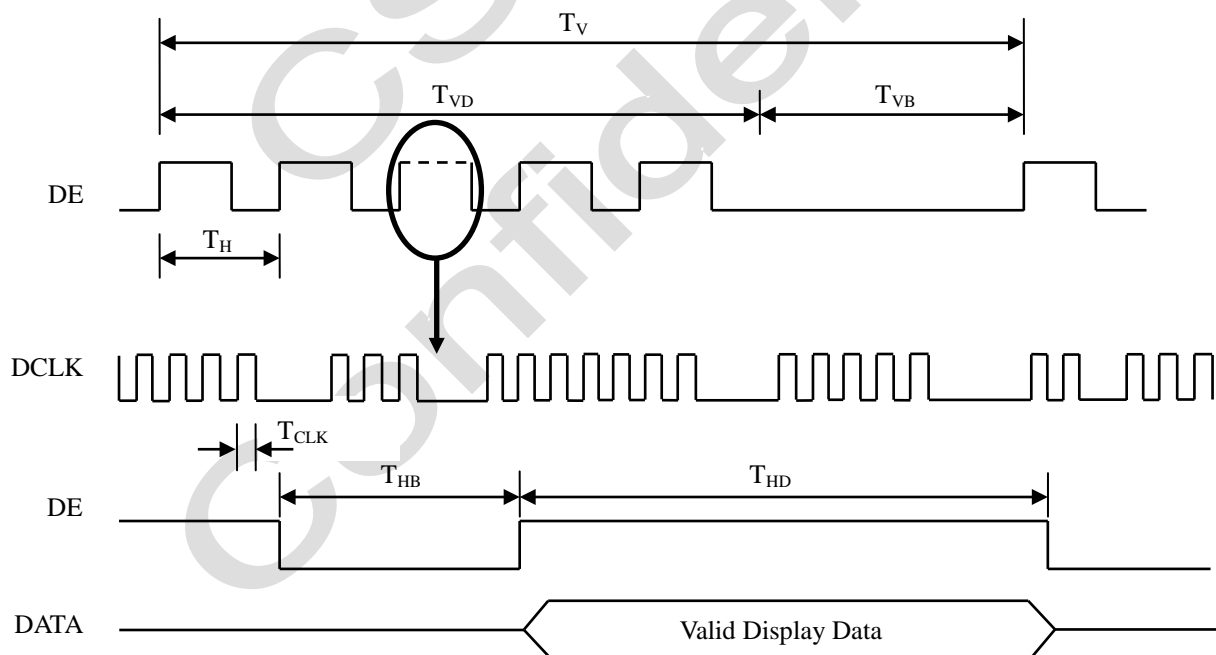
Fig. 6.1 Interface signal timing diagram

6.2 Power On/Off Sequence

To prevent a latch-up or DC operation of LCD module, the power on/off sequence should be as the diagram below.
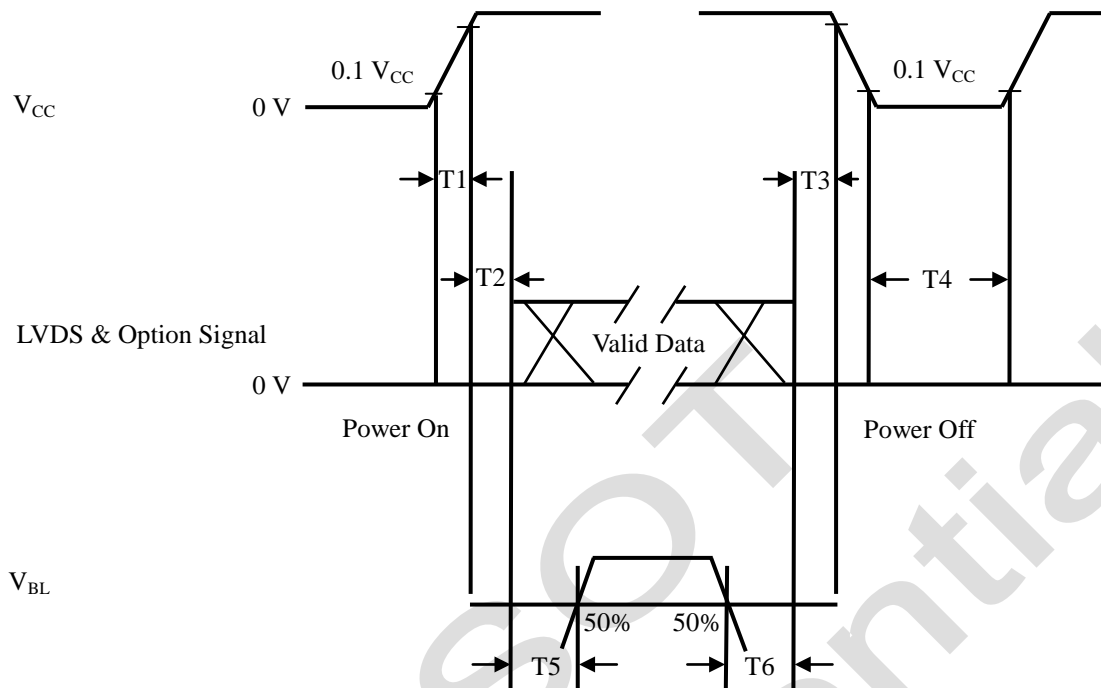
Fig. 6.2 Power on/off sequence

Parameter	Values			Unit
	Min.	Typ.	Max.	
T1	0.5	-	10.0	ms
T2	0	-	-	ms
T3	0	-	-	ms
T4	1000	-	-	ms
T5	500	-	-	ms
T6	100	-	-	ms

Attention:

(1) The supply voltage of the external system for the module input should follow the definition of V_{CC}.

(2) Apply the lightbar voltage within the LCD operation range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily become abnormal screen.

(3) In case that V_{CC} is in off level, please keep the level of input signals on the low or high impedance. If T2 < 0, that may cause electrical overstress.

(4) T4 should be measured after the module has been fully discharged between power off and on period.

(5) Interface signal shall not be kept at high impedance when the power is on.

7. Optical Characteristics

7.1 Measurement Conditions

The table below is the test condition of optical measurement.

Item	Symbol	Value	Unit
Ambient Temperature	T_A	25 ± 2	°C
Ambient Humidity	H_A	50 ± 10	% RH
Supply Voltage	V_{CC}	12	V
Driving Signal	Refer to the typical value in Chapter 3: Electrical Specification		
Light Source Current (Each Unit)	I_L	80	mA
Vertical Refresh Rate	F_R	60	Hz

To avoid abrupt temperature change during optical measurement, it's suggested to warm up the LCD module more than 60 minutes after lighting the backlight and in the windless environment.

To measure the LCD module, it is suggested to set up the standard measurement system as Fig. 7.1. The measuring area S should contain at least 500 pixels of the LCD module as illustrated in Fig. 7.2 (A means the area allocated to one pixel). In this model, for example, the minimum measuring distance Z is 370 mm when θ is 2 degree. Hence, 500 mm is the typical measuring distance. This measuring condition is referred to 301-2H of VESA FPDM 2.0 about viewing distance, angle, and angular field of view definition.
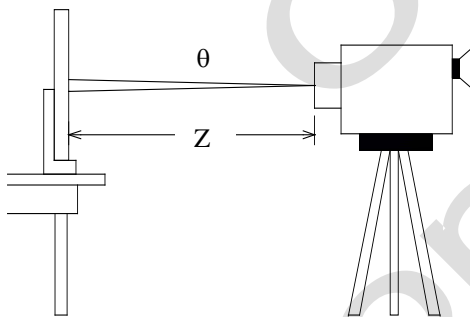

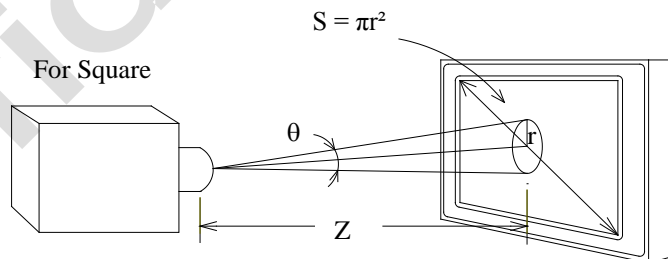Fig. 7.1 The standard set-up system of measurement

Fig. 7.2 The area S contains at least 500 pixels to be measured

$$N = \frac{S}{A} \geqslant 500 \text{ pixels}$$

N means the actual number of the pixels in the area S.

Ver. 1.1

7.2 Optical Specifications

The table below of optical characteristics is measured by MINOLTA CS2000, MINOLTA CA310, ELDIM OPTI Scope-SA and ELDIM EZContrast in dark room.

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Static Contrast Ratio		CR		-	4000	-	-	(1) (2)
Response Time		T_L		-	6.5	-	ms	(3) OPTI Scope-SA
Center Luminance		L_W		300	350	-	cd/m^2	(2) (4)
Uniformity of White Screen		-		75	-	-	%	(2) (5)
Color Chromaticity (CIE1931)	Red	R_X	$\theta_H = 0°$, $\theta_V = 0°$ Normal direction at center point of the LCD module.	Typ. - 0.03	(0.630)	Typ. + 0.03	-	(2) (6)
		R_Y			(0.330)		-	
	Green	G_X			(0.320)		-	
		G_Y			(0.630)		-	
	Blue	B_X			(0.150)		-	
		B_Y			(0.045)		-	
	White	W_X			0.280		-	
		W_Y			0.290		-	
	Color Gamut	CG		-	72	-	% NTSC	
Viewing Angle	Horizontal	θ_{H+}	CR ≥ 10	-	89	-	Deg.	(7) ELDIM EZContrast
		θ_{H-}		-	89	-		
	Vertical	θ_{V+}		-	89	-		
		θ_{V-}		-	89	-		

Note:

(1) Definition of static contrast ratio (CR):

It's necessary to switch off all the dynamic and dimming function when measuring the static contrast ratio.

$$\text{Static Contrast Ratio (CR)} = \frac{\text{CR-W}}{\text{CR-D}}$$

CR-W is the luminance measured by LMD (light-measuring device) at the center point of the LCD module with full-screen displaying white. The standard setup of measurement is illustrated in Fig. 7.3; CR-D is the luminance measured by LMD at the center point of the LCD module with full-screen displaying black.

(2) The LMD in the item could be a spectroradiometer such as (KONICA MINOLTA) CS2000, CS1000, (TOPCON) SR-UL2 or the same level spectroradiometer. Other display color analyzer (KONICA MINOLTA) CA210, CA310 or (TOPCON) BM-7 could be involved after being calibrated with a spectroradiometer on each stage of a product.
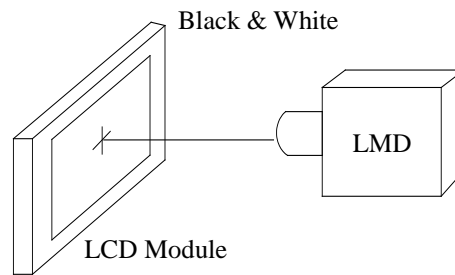
Fig. 7.3 The standard setup of CR measurement

(3) Response time T_L is defined as the average transition time in the response time matrix. The table below is the response time matrix in which each element $t_{X\text{ to }Y}$ is the transition time from luminance ratio X to Y. X and Y are two different luminance ratios among 0%, 25%, 50%, 75%, and 100% luminance. The transition time $t_{X\text{ to }Y}$ is defined as the time taken from 10% to 90% of the luminance difference between X and Y (X < Y) as illustrated in Fig.3. When X > Y, the definition of $t_{X\text{ to }Y}$ is the time taken from 90% to 10% of the luminance difference between X and Y. The response time is optimized on refresh rate $F_R = 60$Hz.

Measured Transition Time		Luminance Ratio of Previous Frame				
		0%	25%	50%	75%	100%
Luminance Ratio of Current Frame	0%		$t_{25\%\text{ to }0\%}$	$t_{50\%\text{ to }0\%}$	$t_{75\%\text{ to }0\%}$	$t_{100\%\text{ to }0\%}$
	25%	$t_{0\%\text{ to }25\%}$		$t_{50\%\text{ to }25\%}$	$t_{75\%\text{ to }25\%}$	$t_{100\%\text{ to }25\%}$
	50%	$t_{0\%\text{ to }50\%}$	$t_{25\%\text{ to }50\%}$		$t_{75\%\text{ to }50\%}$	$t_{100\%\text{ to }50\%}$
	75%	$t_{0\%\text{ to }75\%}$	$t_{25\%\text{ to }75\%}$	$t_{50\%\text{ to }75\%}$		$t_{100\%\text{ to }75\%}$
	100%	$t_{0\%\text{ to }100\%}$	$t_{25\%\text{ to }100\%}$	$t_{50\%\text{ to }100\%}$	$t_{75\%\text{ to }100\%}$	

$t_{X\text{ to }Y}$ means the transition time from luminance ratio X to Y.
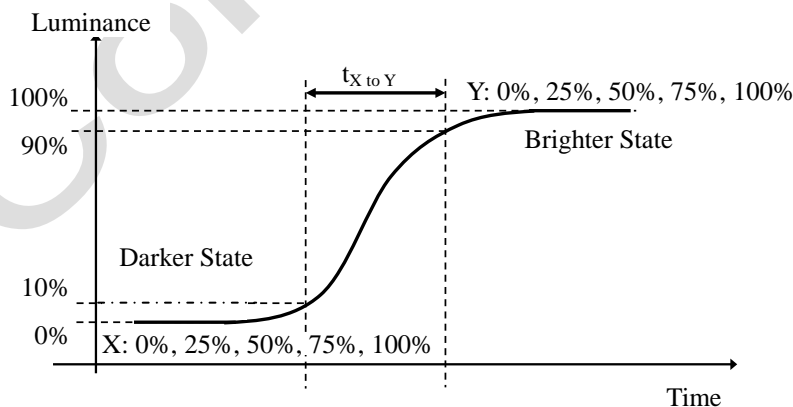
Fig. 7.4 The definition of $t_{X\text{ to }Y}$

All the transition time is measured at the center point of the LCD module by ELDIM OPTI Scope-SA.

Ver. 1.1

(4) Definition of center luminance (L_W):

The luminance is measured at the center point of the LCD module with full-screen displaying white. Fig. 7.5 shows the standard setup of luminance measurement.
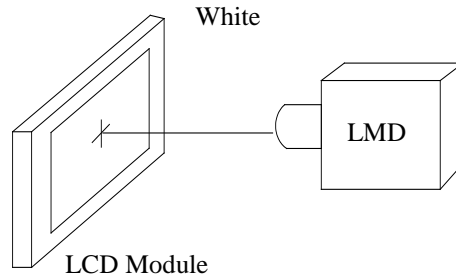

Fig. 7.5 The standard setup of luminance measurement

(5) Definition of uniformity of white screen:

The luminance Li (i from 1 to 9) is measured at the 9 points defined in Fig. 7.6. H and V indicate active area.

From the measured set of luminance values Li (i from 1 to 9), the minimum luminance is denoted as L_{min} and the maximum luminance is denoted as L_{max}. The uniformity of white screen is defined according to

Uniformity = L_{min} / L_{max} x 100%.
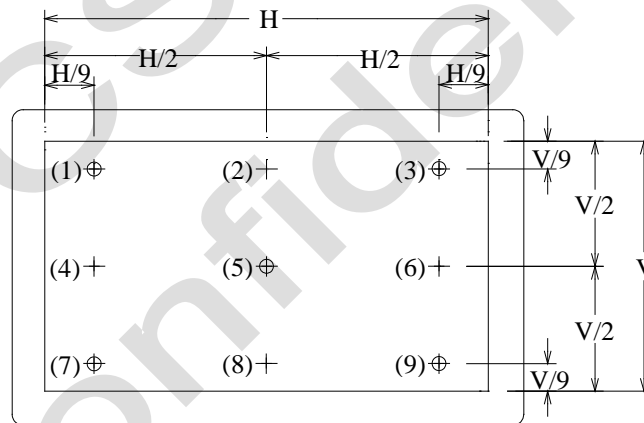
Fig. 7.6 Symbol " + " defines the 9 measuring locations (1), (2), (3) ··· (9)

(6) Definition of color chromaticity:

Each chromaticity coordinates (x, y) are measured in CIE1931 color space when full-screen displaying primary color R, G, B and white. The color gamut is defined as the fraction in percent of the area of the triangle bounded by R, G, B coordinates and the area is defined by NTSC 1953 color standard in the CIE color space. Chromaticity coordinates are measured by CS2000 and the standard setup of measurement is shown in Fig. 7.7.
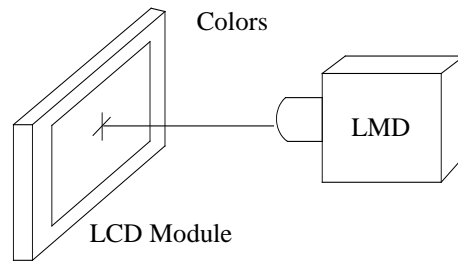
Fig. 7.7 The standard setup of color chromaticity measurement

(7) Definition of viewing angle coordinate system (θ_H, θ_V):

The contrast ratio is measured at the center point of the LCD module. The viewing angles are defined at the angle that the contrast ratio is larger than 10 at four directions relative to the perpendicular direction of the LCD module (two vertical angles: up θ_{V+} and down θ_{V-}; and two horizontal angles: right θ_{H+} and left θ_{H-}) as illustrated in Fig. 7.8. The contrast ratio is measured by ELDIM EZ Contrast.
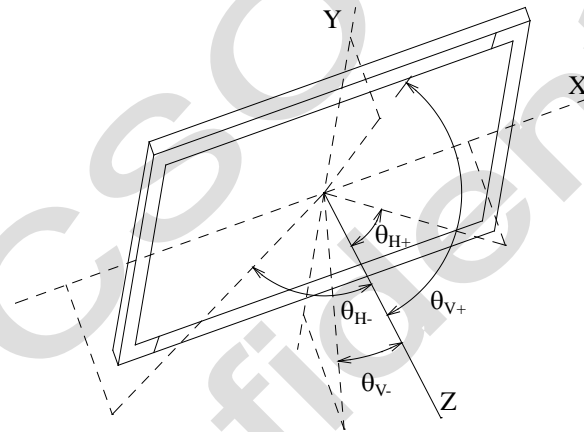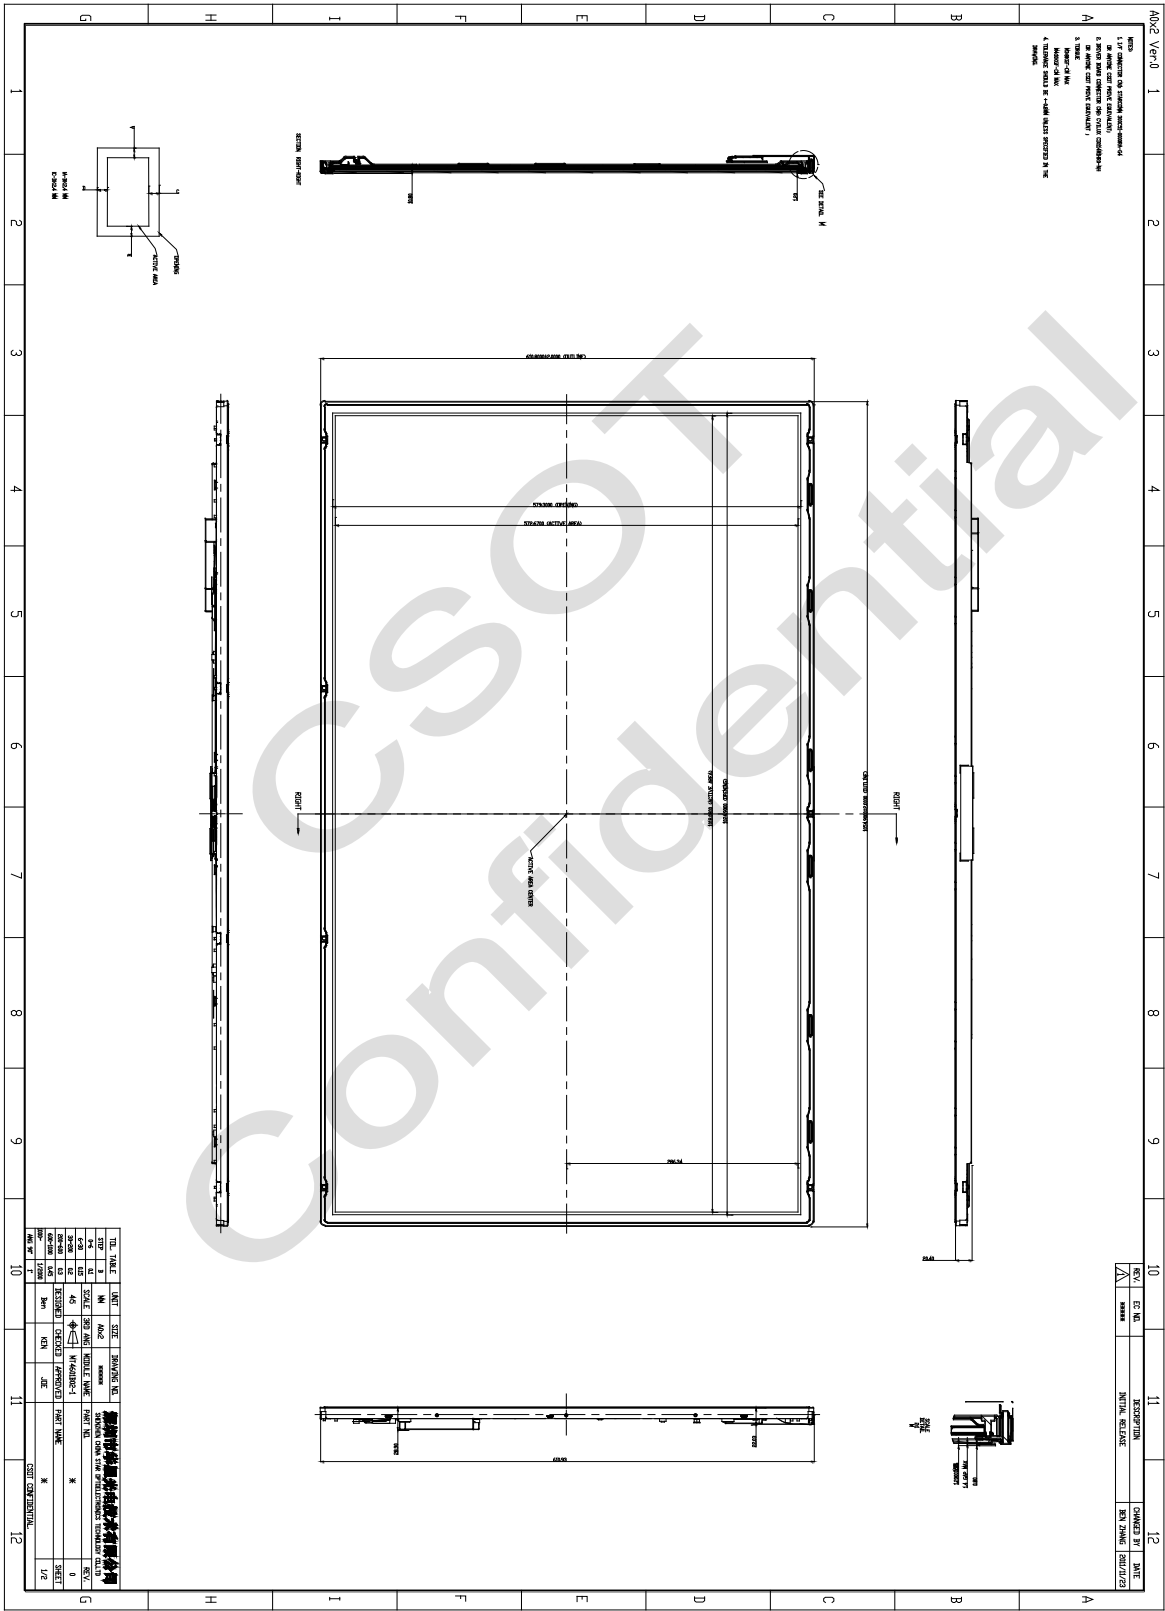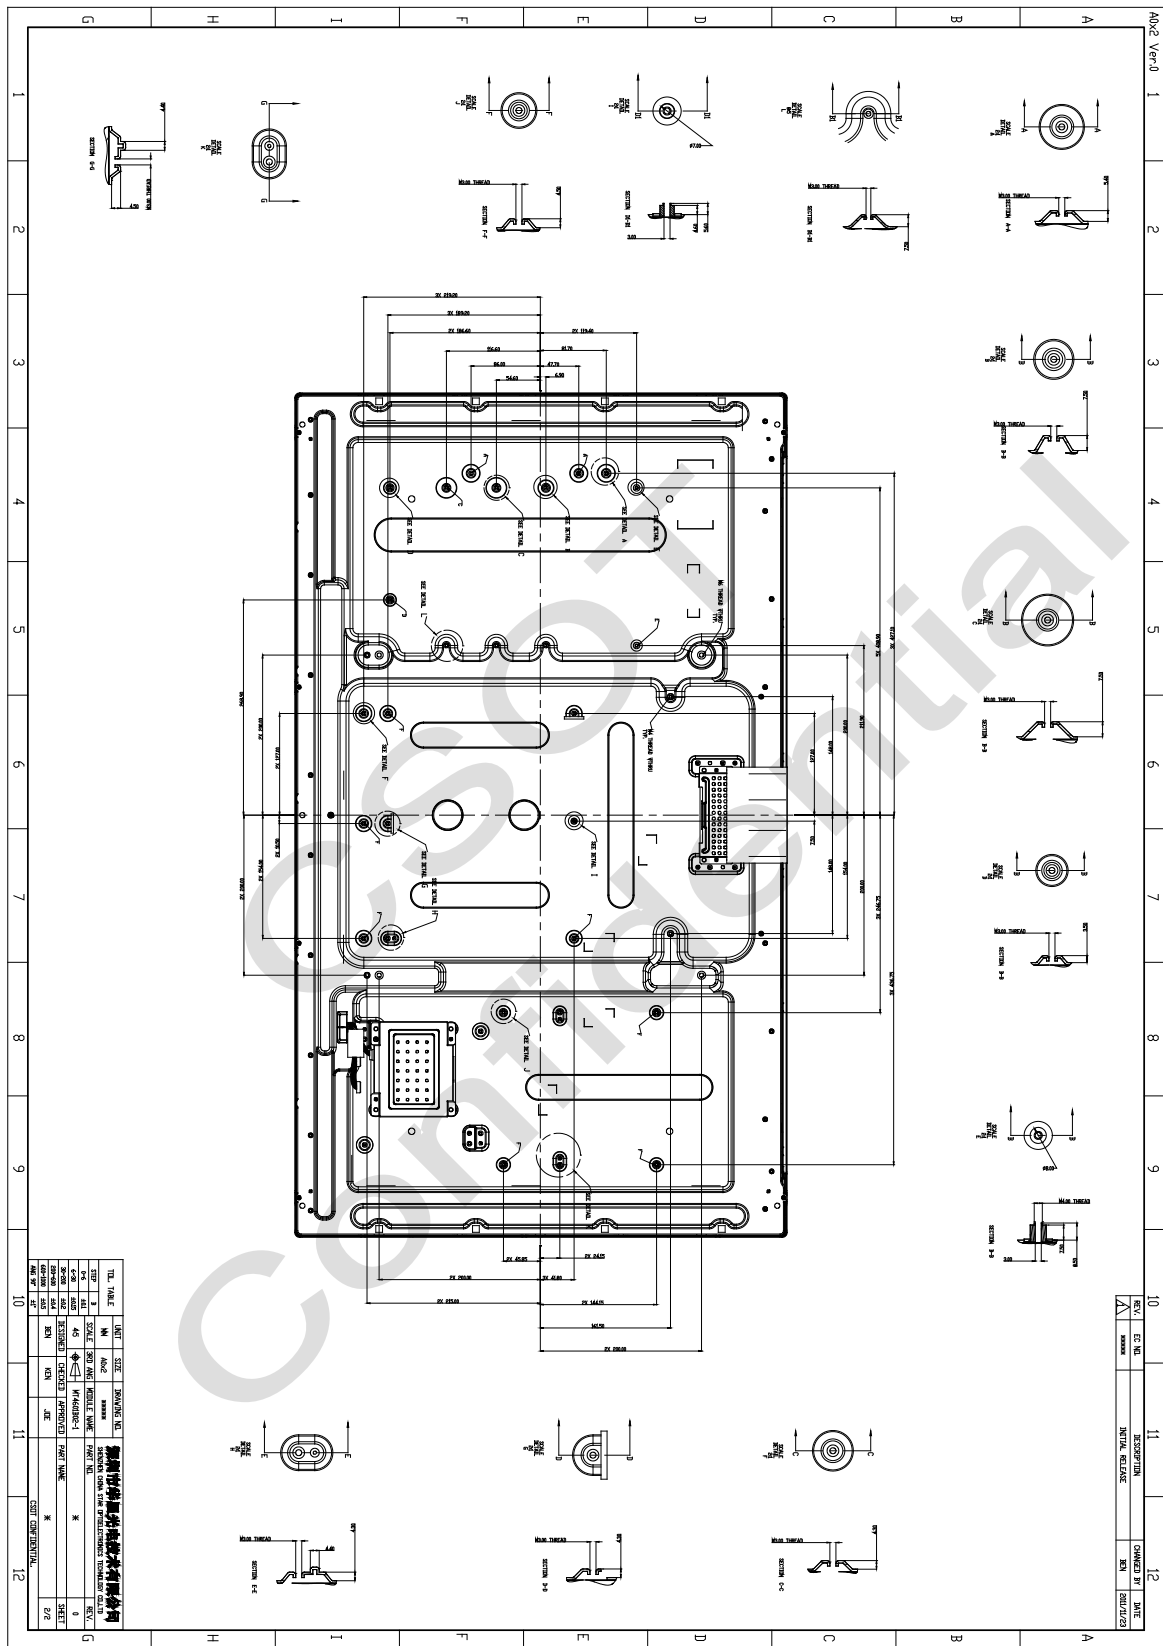

Fig. 7.8 Viewing angle coordination system

8. Mechanical Characteristics

8.1 Mechanical Specification

Ver. 1.1

8.2 Packing

8.2.1 Packing Specifications

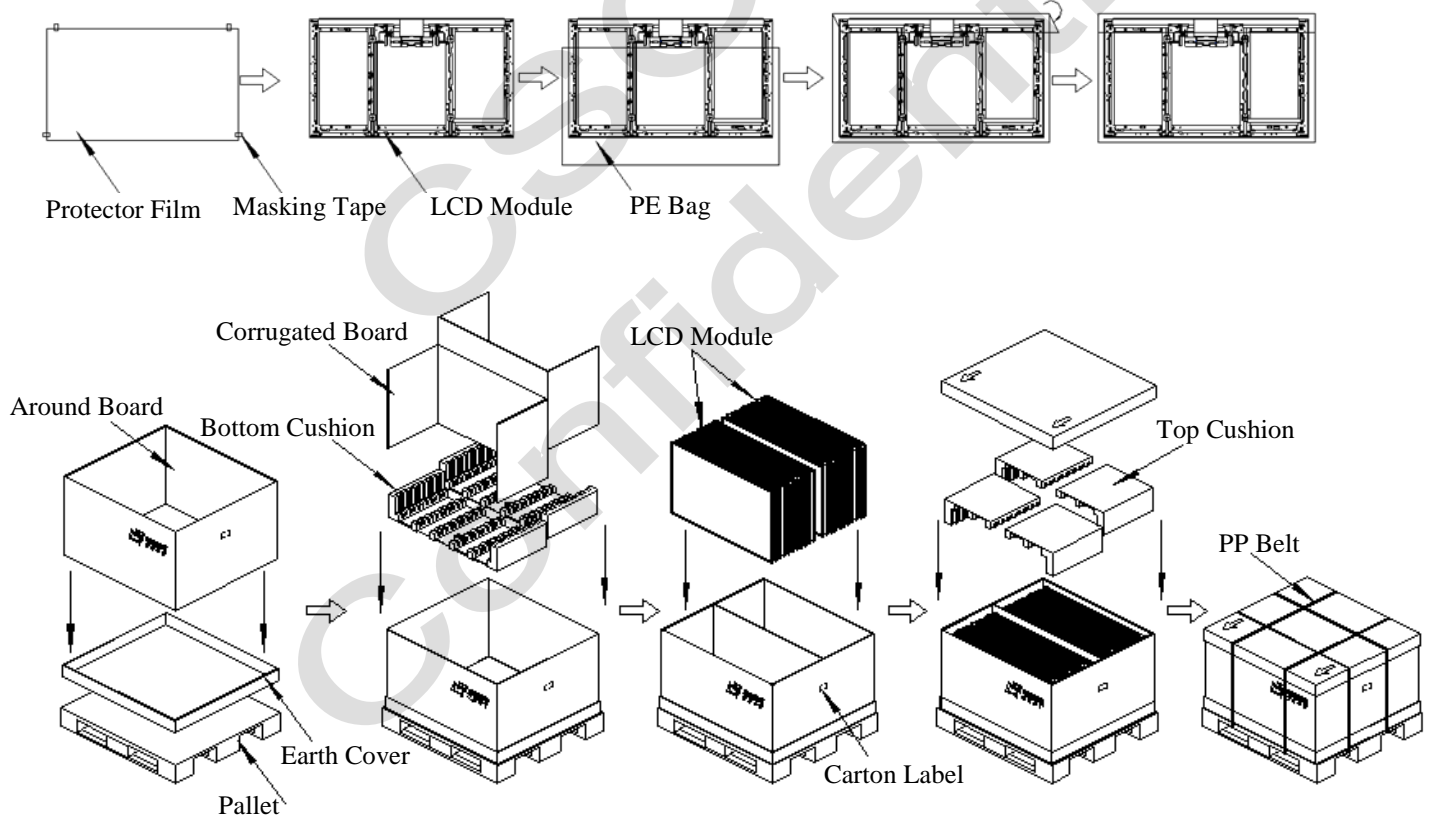| Item	Specification		
	Quantity	Dimension (mm)	Weight (kg)
Packing Box	22pcs / box	1157.0 (L) x 1066.0 (W) x 675.0 (H)	Net Weight: 209.0 Gross Weight: 223.0
Pallet	1	1200 (L) x 1100 (W) x 175 (H)	Net Weight: 19
Stack Layer	3		
Boxes per Pallet	1 box / pallet		
Pallet after Packing	22 pcs / pallet	1200 (L) x 1120 (W) x 850(H)	Gross Weight: 242

8.2.2 Packing Method

Fig. 8.1 Packing method (protector film stick on the front of the LCD module)
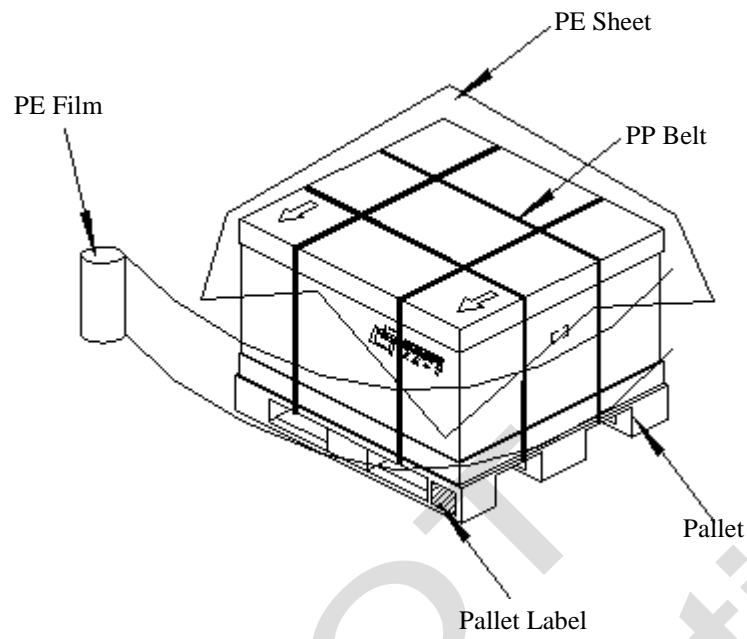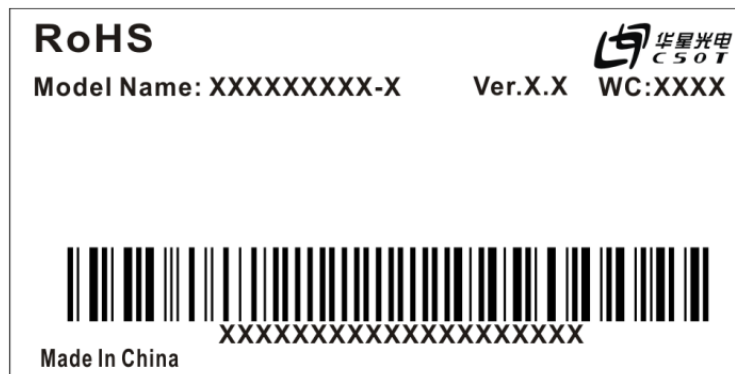
PE Sheet

PE Film

PP Belt

Pallet

Pallet Label

Fig. 8.2 Shipping method

9. Definition of Labels

9.1 Module Label

For RoHs compatible products, CSOT will add RoHS for identification.

Model Name: MT4601B02-1

Ver.X.X: Version, for example: 0.1, 0.2, … , 1.1, 1.2, …, 2.1, 2.2, ···

WC (Week Code): XX XX

Week

Year

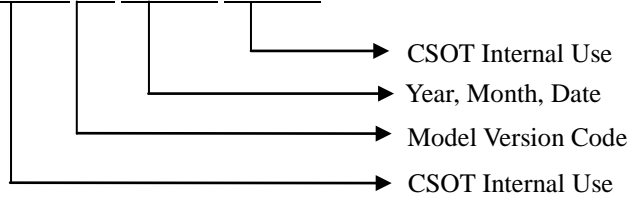Year: 2010 = 10, 2011 = 11 … 2020 = 20, 2021 = 21…

Week: 01, 02, 03 …

Serial Number: XXXXXXXXXXXX XXXXXXXX

CSOT Internal Use

Panel ID

9.2 Carton Label

Ver. 1.1

Serial Number: <u>XXXXX</u> <u>XX</u> <u>XXXXX</u> <u>XXXXX</u>

            → CSOT Internal Use

          → Year, Month, Date

        → Model Version Code

      → CSOT Internal Use

Manufactured Date:

   Year: 2010 = 10, 2011 = 11…2020 = 20, 2021 = 21…

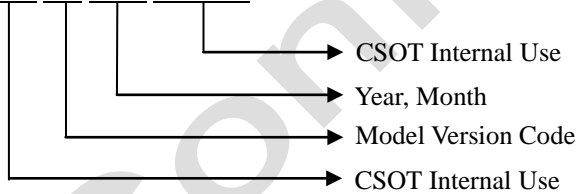   Month: 1~9, A~C, for Jan. ~ Dec.

   Date: 01~31, for 1st to 31st

Model Version Code: Version of product, for example: 01, 02, 11, 12…

9.3 Pallet Label

RoHS
Model Name: XXXXXXXXX-X **Ver.X.X** 华星光电 CSOT
Module Qty.: XX **Carton Qty.: X**
Note:

XXXXXXXXXXXXX

Made In China

Serial Number: <u>XXX</u> <u>XX</u> <u>XXX</u> <u>XXXXX</u>

         → CSOT Internal Use

       → Year, Month

     → Model Version Code

   → CSOT Internal Use

Ver. 1.1

10. Precautions

10.1 Assembly and Handling Precautions

(1) Do not apply rough force such as bending or twisting to the LCD module during assembly.

(2) It is recommended to assemble or install a LCD module into the user's system in clean working areas. The dust and oil may cause electrical short or damage the polarizer.

(3) Do not apply pressure or impulse to the LCD module to prevent the damage to LCD panel and backlight.

(4) Always follow the correct power-on sequence. This can prevent the damage and latch-up to the LSI chips.

(5) Do not plug in or pull out the interface connector while the module is in operation.

(6) Do not disassemble the LCD module.

(7) Use soft dry cloth without chemicals for cleaning because the surface of polarizer is very soft and easily be scratched.

(8) Moisture can easily penetrate into the LCD module and may cause the damage during operation.

(9) High temperature or humidity may deteriorate the performance of the LCD module. Please store LCD modules in the specified storage conditions.

(10) When ambient temperature is lower than 10℃, the display quality might be deteriorated. For example, the response time will become slow, and the starting voltage of LED light bar will be higher than that in room temperature.

10.2 Safety Precautions

(1) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.

(2) After the LCD module's end of life, it is not harmful in case of normal operation and storage.